

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



Rec'd PCT/PTO 17 MAY 2005



(43) International Publication Date  
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number  
WO 2004/046496 A1

(51) International Patent Classification<sup>7</sup>: E21B 10/64, 7/20

(21) International Application Number:

PCT/FI2003/000876

(22) International Filing Date:

18 November 2003 (18.11.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

20022043

18 November 2002 (18.11.2002)

FI

(71) Applicants and

(72) Inventors: **HULKONEN, Teijo** [FI/FI];  
Koivupirtinkatu 14, FIN-33580 Tampere (FI).  
**PAASONEN, Hannu** [FI/FI]; Kyyrinkatu 8 A 15,  
FIN-37100 Nokia (FI).

(74) Agent: **NIEMINEN, Taisto**; T Nieminen Oy, Kehräsaari  
B, FIN-33200 Tampere (FI).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: BIT ASSEMBLY FOR A HAMMERING DRILL

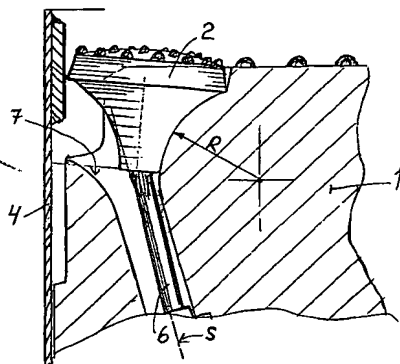

(57) **Abstract:** A bit assembly for a hammering and rotating drill, in which assembly the drill body (1) is arranged to drill essentially the middle portion of the hole and in the drill body (1) mounted one or more hammering bit (2), (3) is arranged to drill the outer circle of the hole. The outer circle of the hole drilling bits (2), (3) are arranged to drill a drilling surface, which locates further behind in the drilling direction than for the drill body (1) meant drilling surface (L1) and that the mentioned bits (2), (3) are further mounted in a drill body (1) formed counter cavities (7), the axial directions (S) of which have either the same direction as the drilling direction has or deviate outwards from it and mentioned bits can at least a part of their way out of the counter cavities be transported out in the direction which deviates from the axial direction (S) of the counter cavity.

